


DIN 1530/ISO 6751

Hårdhed: 70 HRc

Kerne: 45 HRc

Hoved: 45 HRc

Mat.: 1.2343

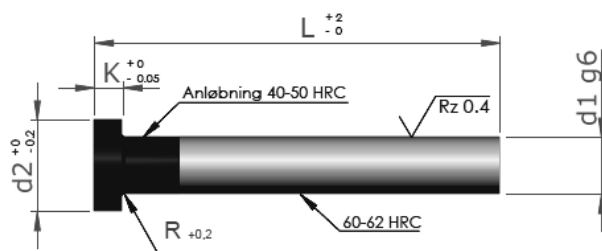

Bestillingsnr.: UDST-Ø x L-A

ØD1	D2	K	Pris							
			L							
			100	125	160	200	250	315	400	500
1,5	3	1,5								
2,0	4	2								
2,2	4	2								
2,5	5	2								
3,0	6	3								
3,2	6	3								
3,5	7	3								
3,7	7	3								
4,0	8	3								
4,2	8	3								
4,5	8	3								
5,0	10	3								
5,2	10	3								
5,5	10	3								
6,0	12	5								
6,2	12	5								
6,5	12	5								
7,0	12	5								
8,0	14	5								
8,2	14	5								
8,5	14	5								
9,0	14	5								
10,0	16	5								
10,2	16	5								
10,5	16	5								
11,0	16	5								
12,0	18	7								
12,2	18	7								
12,5	18	7								
14,0	22	7								
16,0	22	7								
18,0	24	7								
20,0	26	8								
25,0	32	8								
32,0	40	8								

Andre længder på forespørgsel