


DIN 1530/ISO 6751

Skaft : 60-62 HRC

Hoved: 40-50 HRC

Mat.: WS-1.2067

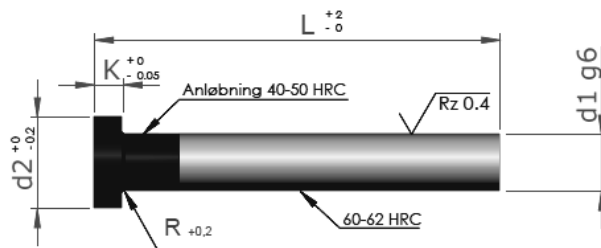

Bestillingsnr.: UDST- Ø x L-AH

			Pris					
Ø/d1	d2	K	L					
			100	125	160	200	250	315
1,5	3	1,5						
2,0	4	2						
2,2	4	2						
2,5	5	2						
2,7	5	2						
3,0	6	3						
3,2	6	3						
3,5	7	3						
3,7	7	3						
4,0	8	3						
4,2	8	3						
4,5	8	3						
5,0	10	3						
5,2	10	3						
5,5	10	3						
6,0	12	5						
6,2	12	5						
6,5	12	5						
7,0	12	5						
8,0	14	5						
8,2	14	5						
8,5	14	5						
9,0	14	5						
10,0	16	5						
10,2	16	5						
10,5	16	5						
11,0	16	5						
12,0	18	7						
12,2	18	7						
12,5	18	7						
14,0	22	7						
16,0	22	7						
18,0	24	7						
20,0	26	8						

Andre længder på forespørgsel